



# 32-bit ASNs

---

Philip Smith


MENOG 2  
19-21 November 2007  
Doha, Qatar



# ASN status

---

- The pool of 16-bit ASNs will soon be exhausted
  - Analysis at <http://www.potaroo.net/tools/asns/>
  - Estimates are that the 16-bit ASN pool will be exhausted late 2010
- Work started in 2001 to extend the ASN pool to 32-bits

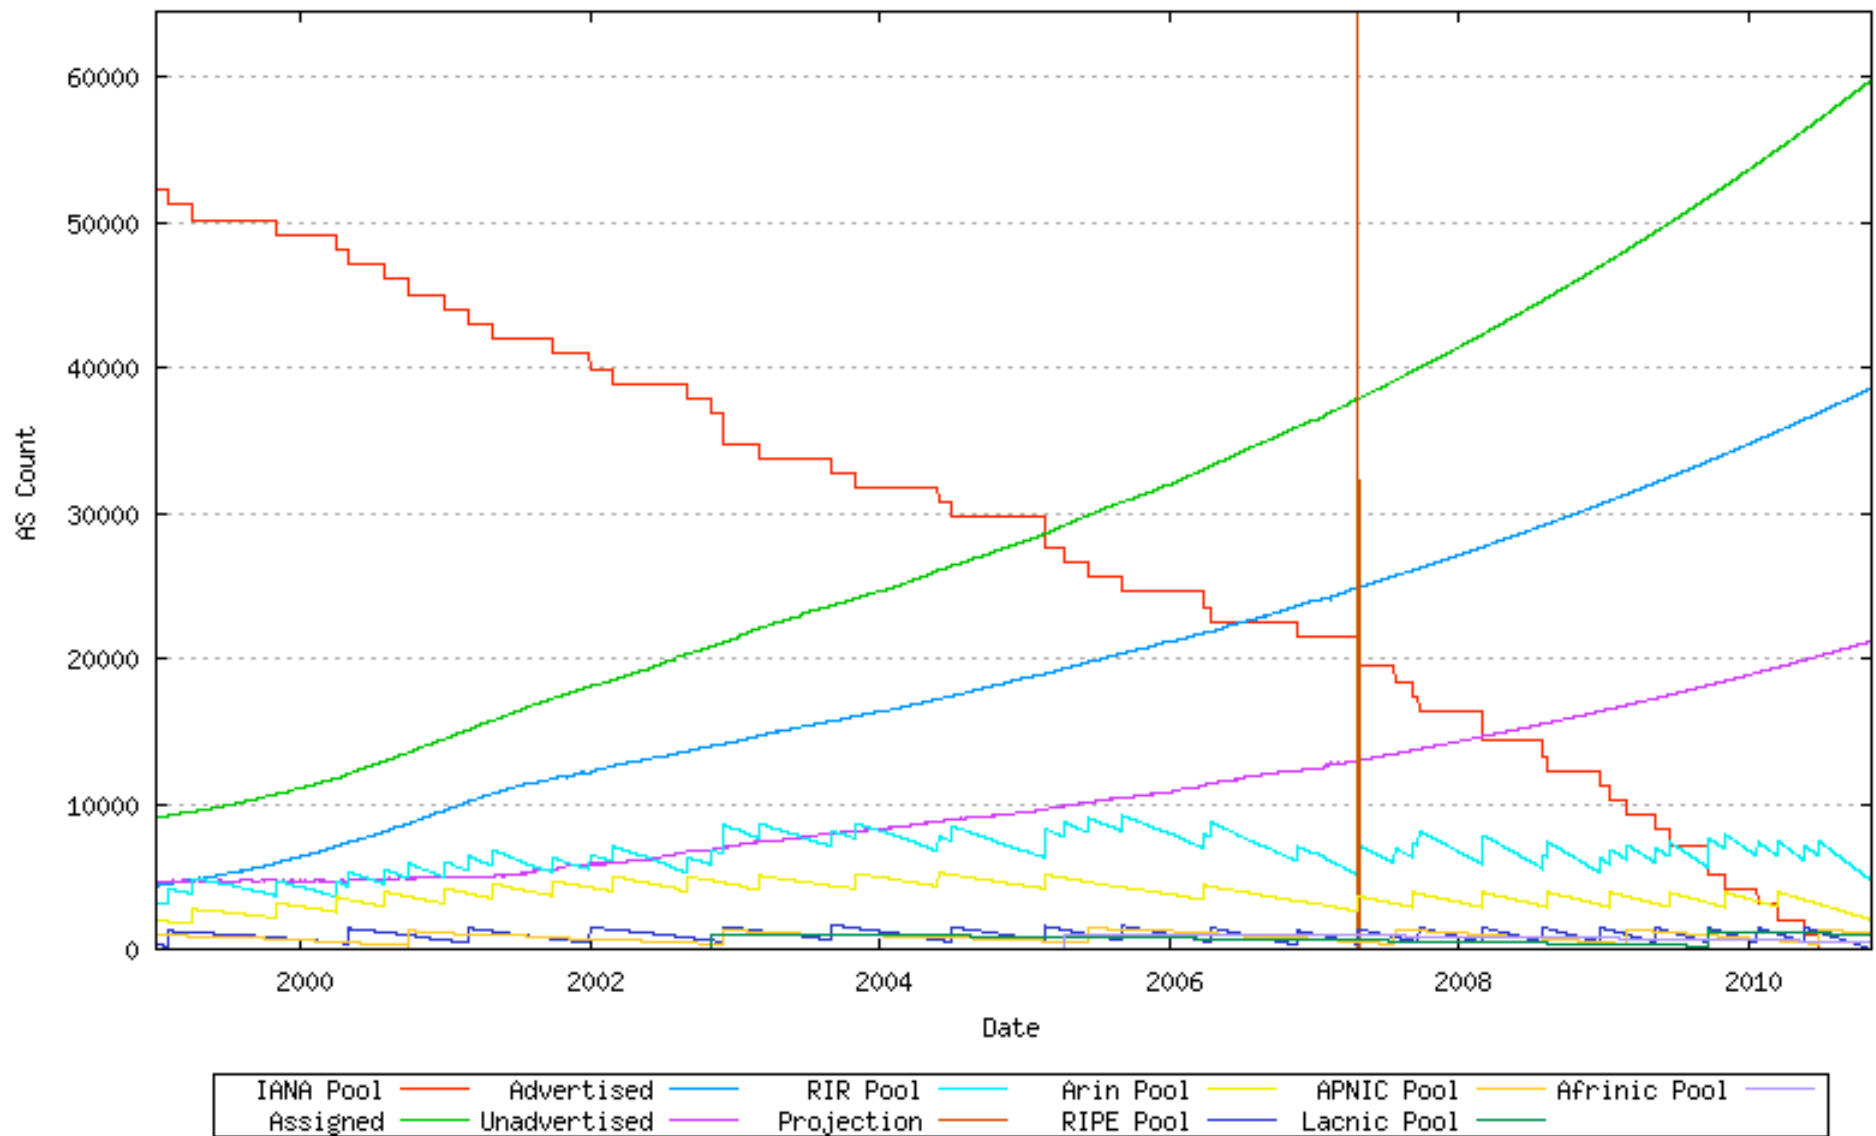

Source: <http://www.potaroo.net/tools/asns/fig28.png>



# 32-bit ASNs

---

- Standards documents (drafts)
  - Description of 32-bit ASNs
    - [www.rfc-editor.org/rfc/rfc4893.txt](http://www.rfc-editor.org/rfc/rfc4893.txt)
  - Proposal for the representation of 32-bit ASNs
    - [www.ietf.org/internet-drafts/draft-michaelson-4byte-as-representation-04.txt](http://www.ietf.org/internet-drafts/draft-michaelson-4byte-as-representation-04.txt)
  - New extended community
    - [www.ietf.org/internet-drafts/draft-rekhter-as4octet-ext-community-02.txt](http://www.ietf.org/internet-drafts/draft-rekhter-as4octet-ext-community-02.txt)
- AS 23456 is reserved as interface between 16-bit and 32-bit ASN world



# Getting a 32-bit ASN

---

- Sample RIR policy
  - [www.apnic.net/docs/policy/asn-policy.html](http://www.apnic.net/docs/policy/asn-policy.html)
- From 1st January 2007
  - 32-bit ASNs available on request
- From 1st January 2009
  - 32-bit ASNs assigned by default
  - 16-bit ASNs only available on request
- From 1st January 2010
  - No distinction – ASNs assigned from 32-bit pool



# Representation

---

- 32-bit ASNs extend the pool:
  - 0-65535 extended to 0-4294967295
- Still discussion on representation of 65536-4294967295 range
- Some favour:
  - For 65536-4294967295: X.Y
    - (draft-michaelson-4byte-as-representation-02.txt)
  - But how will regular expressions work?
- Some favour traditional format
  - But gets bulky to handle when numbers get v big



# IANA Assignments

---

- 0.0 - 0.65535 16-bit ASN block
- 2.0 - 2.1023 APNIC
- 3.0 - 3.1023 RIPE NCC
- 4.0 - 4.1023 LACNIC
- 5.0 - 5.1023 AfriNIC
- 6.0 - 6.1023 ARIN
- Remainder are reserved or held by IANA



# Changes (1)

---

- 32-bit ASNs are backwardly compatible with 16-bit ASNs
- There is no flag day
- You do NOT need to:
  - Throw out your old routers
  - Replace your 16-bit ASN with a 32-bit ASN





## Changes (2)

---

- You do need to be aware that:
  - Your customers will come with 32-bit ASNs
  - ASN 23456 is not a bogon!
  - You will need a router supporting 32-bit ASNs to use a 32-bit ASN
- If you have a proper BGP implementation, 32-bit ASNs will be transported silently across your network



# How does it work (1)?

---

- Local router only supports 16-bit ASN
- Remote router uses 32-bit ASN
- BGP peering initiated:
  - Remote asks local if 32-bit supported (BGP capability negotiation)
  - When local says “no”, remote then presents AS23456
  - Local needs to be configured to peer with remote using AS23456




## How does it work (2)?

---

- BGP peering initiated (cont):
  - BGP session established using AS23456
  - 32-bit ASN included in a new BGP attribute called AS4\_PATH
    - (as opposed to AS\_PATH for 16-bit ASNs)
- Result:
  - 16-bit ASN world sees 16-bit ASNs and 23456 standing in for 32-bit ASNs
  - 32-bit ASN world sees 16 and 32-bit ASNs

# Example:

- Internet with 32-bit and 16-bit ASNs
- AS-PATH length maintained

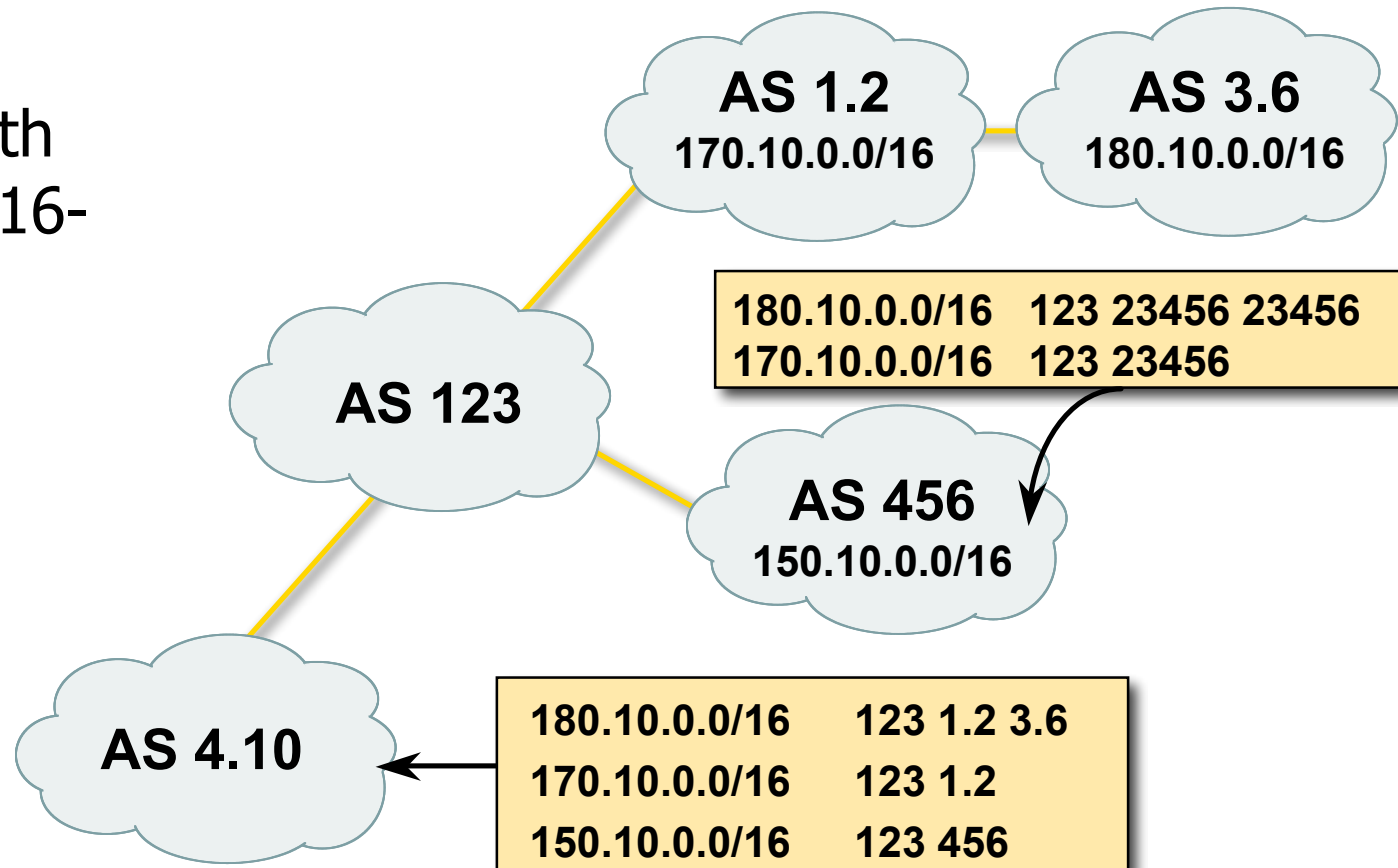



# What has changed?

---

- Two new BGP attributes:
  - AS4\_PATH
    - Carries 32-bit ASN path info
  - AS4\_AGGREGATOR
    - Carries 32-bit ASN aggregator info
  - Well-behaved BGP implementations will simply pass these along if they don't understand them
- AS23456 (AS\_TRANS)



# What do they look like?

---

- Prefix originated by AS 1.202
  - In 32-bit ASN world:

```
# bgpctl show rib 203.10.62.0/24
```

```
flags: * = Valid, > = Selected, I = via IBGP, A = Announced
```

```
origin: i = IGP, e = EGP, ? = Incomplete
```

```
flags destination      gateway    lpref med aspath origin
*> 203.10.62.0/24     147.28.0.1  100    0 0.3130 0.1239 0.4637 0.1221 1.202 i
```

- In 16-bit ASN world:

```
router# sh ip bgp 203.10.62.0
```

```
Network          Next Hop          Metric LocPrf Weight Path
*> 203.10.62.0    202.249.2.169    0 2497 4637 1221 23456 i
```



# 4-byte ASNs – IPv4 BGP Table

---

Network	Next Hop	Path
62.48.31.0/24	203.119.0.116	2.0 12654 6881 9080 8928 8271 3.10 i
66.117.63.0/24	203.119.0.116	2.0 12654 7018 3561 29748 33437 6.3 i
145.125.0.0/20	203.119.0.116	2.0 12654 3.5 i
192.26.93.0/24	203.119.0.116	2.0 12654 7018 2914 4697 2.3 i
193.5.68.0/23	203.119.0.116	2.0 12654 3333 13030 3.13 i
193.31.7.0/24	203.119.0.116	2.0 12654 3257 13237 5539 3.3 i
196.1.15.0/24	196.216.2.49	5.1 i
202.255.47.0/24	203.119.0.116	2.0 12654 3257 2516 7667 2.6 i



# 4-byte ASNs – IPv6 BGP Table

---

Network	Next Hop	Path
*> 2001:df0:2::/48	2001:420:0:8001::1	109 5511 2914 4697 2.3 i
*> 2001:4810:2000::/35	2001:420:0:8001::1	109 30071 33437 6.3 i





# Implementations

---

- Quagga (patches for 0.99.6)
- OpenBGPd (patches for 3.9 & 4.0)
- JunOSe 4.1.0 (ERX only)
  - M and T series – next year?
- Redback



- Support in IOS-XR since 3.4 release last year
- Plan for IOS:
  - 12.2SRD – EFT early next year, release mid 2008
    - For 7600 (and 7200)
  - 12.5T Early 2008
    - For 18/28/3800, 7200, 7300
  - 12.2SB-Rel6 End 2008
    - For 7200,7300,10000
  - 12.2SX End 2008
    - For 6500



# Conclusion

---

- The Internet will not break
- Your network will not break
  
- If you have an ASN today:
  - You don't need to change anything
  - 32-bit ASNs appear as AS 23456
- If you have no ASN today:
  - Your routers will need 32-bit ASN support after 1st January 2010